

# **PREIS<sup>®</sup>**

## **DRAINAGE SYSTEMS**

### **BML - Cast Iron Socketless Drain Pipe Systems**

for road, bridge and tunnel construction





## Tested quality for the highest demands in road, bridge and tunnel construction.

**PREIS is a leading European manufacturer of drainage pipe systems made of cast iron.**

The future-oriented infrastructure construction focuses on the entire life cycle of the building - both with regard to the costs of future customers and in relation to the long-term effects on environment and society.

Cast iron pipe systems according to EN 877 from PREIS® DS offer a robust and durable pipe system for road, bridge and tunnel drainage due to their specific material properties.

Due to the insensitivity of the material to shocks and high temperature fluctuations and its inherent dimensional stability, PREIS® BML piping system has another unique selling point in infrastructure construction compared to other products and has a positive influence on the life cycle of the entire construction.


#circulareconomy

*Build a sustainable future with cast iron!*



In addition, PREIS® BML drainage pipes and fittings meet the high safety requirements in modern drainage and are the ideal product to withstand acidic exhaust gases and road salts.

### Coating structure

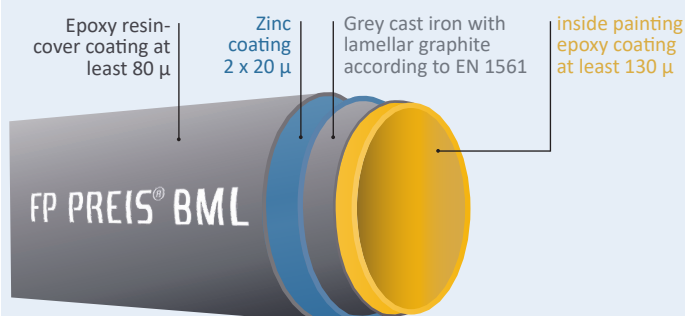

The heavy corrosion protection of the pipe outer coating corresponds to the requirements of ZTV-ING Part 4, Section 3, Appendix A, Table A 4.3.2, component no. 3.3.3 and the TL / TP-KOR steel structures for use on structures and components of federal traffic routes.





## The advantages of cast iron bridge drainage



**Cold and heat resistant:**  
Low thermal expansion



**Weatherproof**  
Defies the weather



**Conserving resources and 100% recyclable**  
Consists mainly of scrap iron



**Stable**  
Dimensionally stable and shockproof, prevents vandalism



**Abrasion resistant**  
Streamlined through smooth surface

## Linear expansion (0,0100 mm/mK), same as reinforced concrete

### Comparison of changes in length of different materials

Extract from RVS 15.04.31, edition 11/2013, table

Material	$\alpha$ mm/mK	$\Delta T$ [°C] 55 $\Delta L$ [mm/10m]
PREIS® BML	0,0100	5,500
TW-reinforced concrete	0,0100	5,500
TW steel	0,0120	6,600
Stainless steel tube	0,0165	9,075
GF-UP	0,0300	16,500
PP-ML	0,0440	24,200
PE	0,1700	93,500

### Relevant standards and regulations for PREIS® BML products are:

**EN 877** | Cast iron pipes and fittings, their joints and accessories for the evacuation of water from building. Requirements, test methods and quality assurance.


**DIN 19522** | Complementary standard to EN 877. This standard mainly includes details about design and layout measurements of pipes and fittings.

**RAL-GZ 698** | RAL quality label demanding a notably extended test range and stricter requirements on quality, which goes far beyond the requirements of EN 877.


**CE Kennzeichen** | Declaration of conformity according to the European Directive for construction products (89/106/EEC).

**EN 1561** | Standard for casting of products made from grey cast iron with lamellar graphite.

# Production process

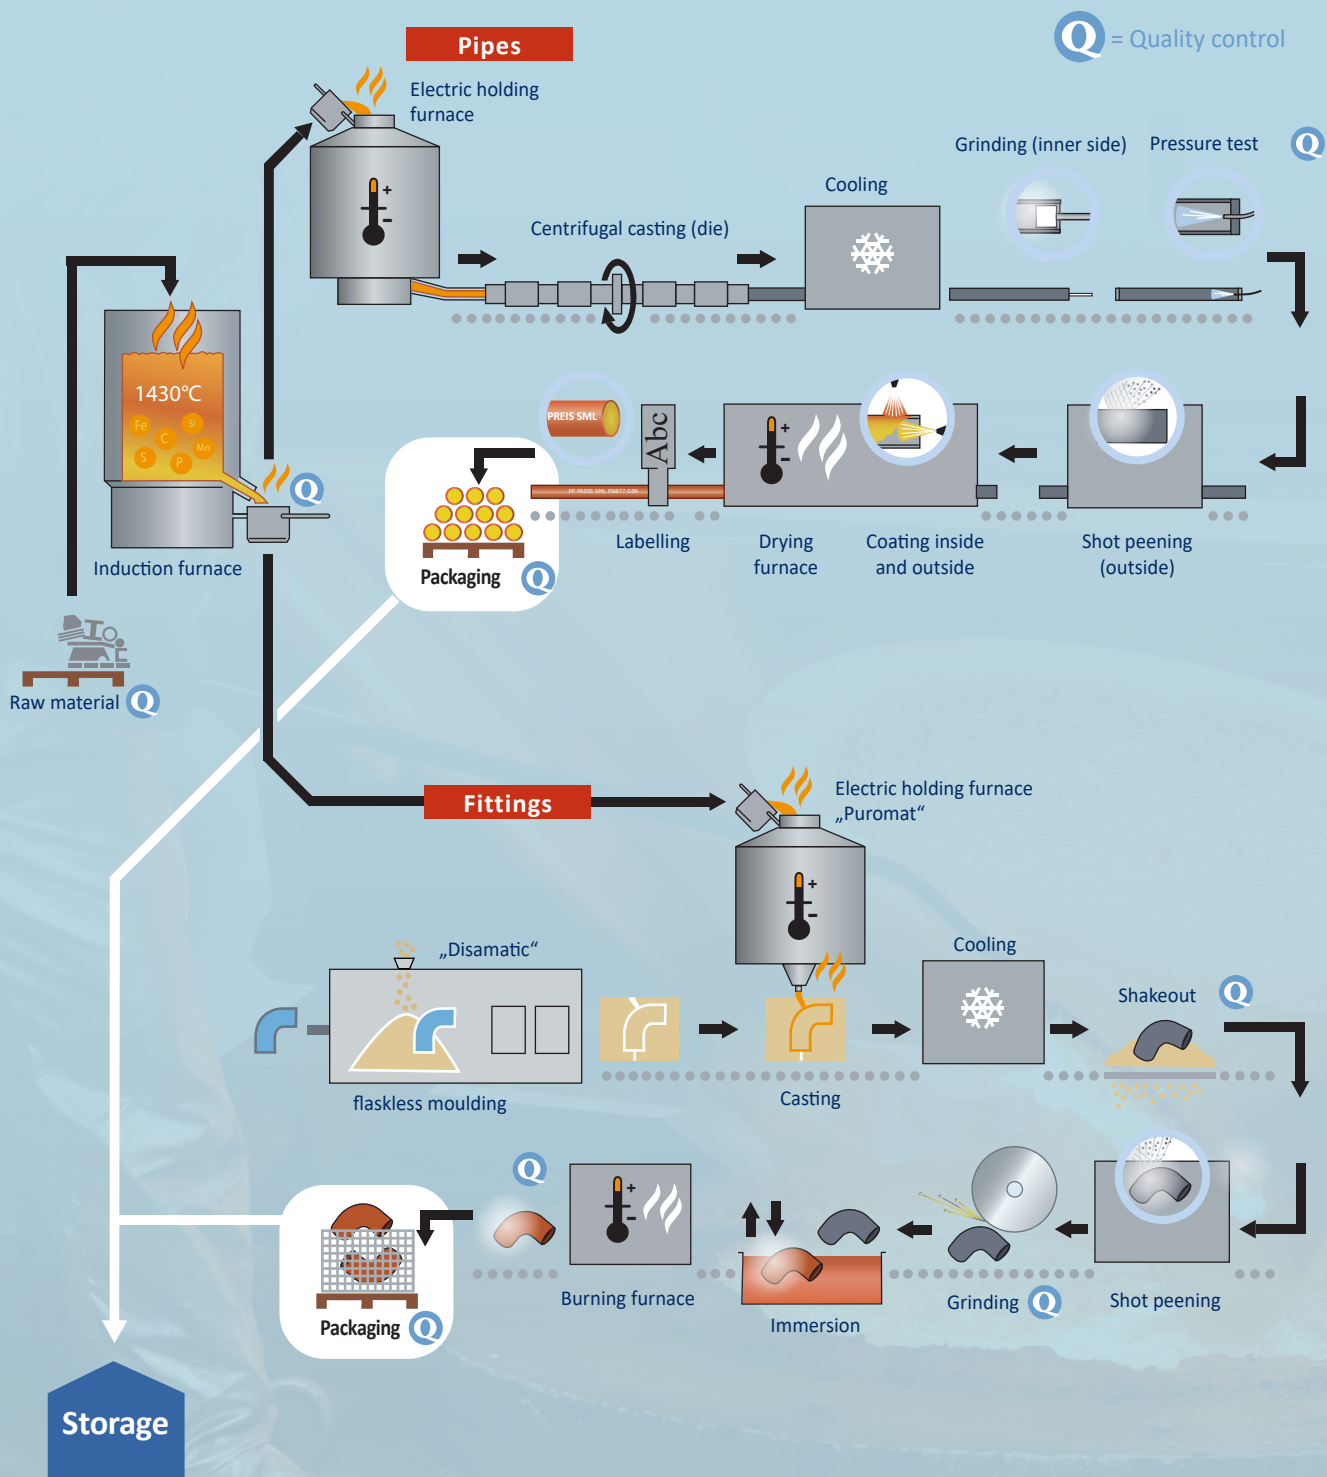

# BML pipe fastenings



Bridges are naturally exposed to heavy environmental influences. The used materials have to withstand the high loads safely and reliable for a long period of time.


In fastening technology, corrosion resistance and static requirements are of decisive importance.

BML pipe fastenings are supplied completely in stainless steel and therefore meets the highest quality requirements.



Due to the different installation situations of the fastenings, the right solutions are always project-related calculated and offered according to the respective requirements.

Applicable regulations, static requirements and environmental influences are vastly important for the project-related calculation, so that an ideally designed system can be tailored for every project.

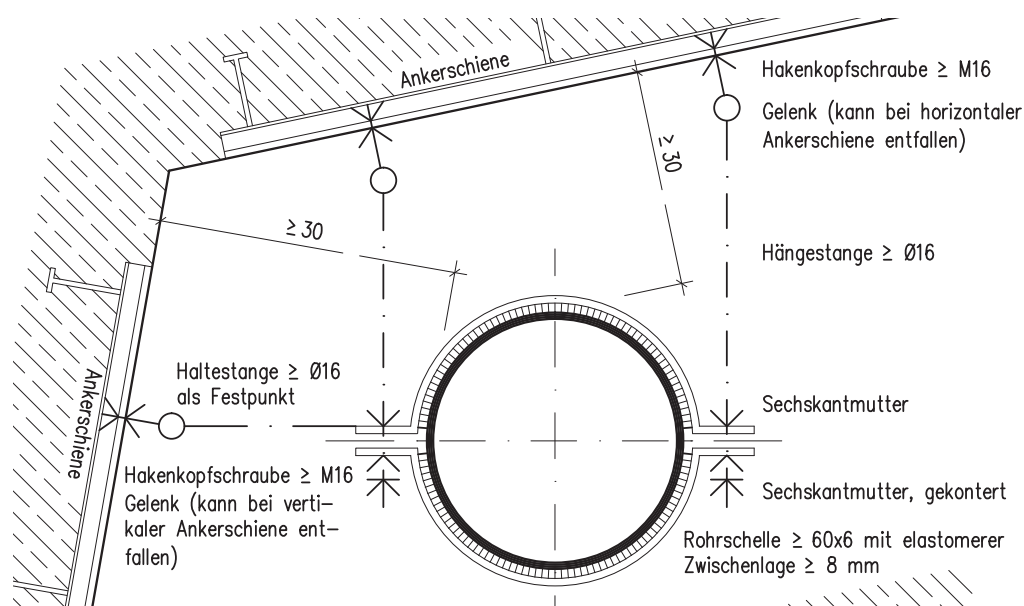

Schematic sketch of the pipe suspension according to Was 13 of the German Federal Road Research Institute (BAST)

**The complete package tailor-made for your project!**

## Dimensions

### — Pipes / fittings / couplings

Nominal width DN	External diameter		Wall thickness		Insertion length (sealing zone) t	Pipe weight		Surface approx. m <sup>3</sup> per m
	DE	Permitted deviation	e	Pipes and fittings permitted deviation		empty approx. kg/m	full approx. kg/m	
100	110	+2/-1	3,5	-0,5	40	9,5	16,7	0,35
125	135	+2	4,0	-0,5	45	12,6	24,5	0,42
150	160	-2	4,0	-0,5	50	15,3	32,2	0,50
200	210	+2,5	5,0	-1,0	60	23,1	54,5	0,65
250	274		5,5	-1,0	70	33,3	87,6	0,85
300	326	-2,5	6,0	-1,0	80	43,2	120,6	1,02
400	429	+2/-3	6,3	-1,3	80	60,1	197,6	1,35
500	532	+2/-3,5	7,0	-1,8	80	82,9	295,3	1,68
600	635	+2/-4	7,7	-1,9	80	108,8	412,3	2,00



## BML Pipes and fittings

### — Product overview


3000 mm PIPE	DN	kg/pcs.	ART.NR.	PU
	100	25,40	41913	38
	125	35,70	41914	23
	150	42,50	41915	20
	200	69,80	41916	10
	250	100,50	41917	8
	300	130,70	41918	6
	400	192,20	41919	2
	500	247,70	41920	2
	600	325,50	41921	3

45° BEND	DN	kg/pcs.	ART.NR.	X
	100	1,60	41922	70
	125	2,30	41925	80
	150	3,50	41926	90
	200	5,70	41927	110
	250	10,30	41928	130
	300	16,50	41929	155

ECCENTRIC REDUCER	DN	kg/pcs.	ART.NR.	A	L
	125/100	1,80	41961	12,5	95
	150/100	2,40	41962	25	105
	150/125	2,60	41963	12,5	110
	200/100	4,10	41964	50	115
	200/125	4,10	41965	37,5	120
	200/150	4,30	41966	25	125
	250/150	4,10	42032	57	140
	250/200	4,30	41968	32	145
	300/250	4,10	41969	26	170



## 45° BRANCH




DN	kg/pcs.	ART.NR.	X1	X2	X3	L
100x100	4,40	41936	70	205	205	275
125x100	5,00	41937	60	220	220	280
125x125	6,10	41938	80	240	240	320
150x100	6,50	41939	55	240	240	295
150x125	7,20	41940	70	255	255	325
150x150	8,30	41941	90	265	265	355
200x100	10,00	41942	40	265	265	305
200x125	11,60	41943	55	280	280	325
200x150	13,30	41944	75	300	300	375
200x200	17,20	41945	115	340	340	455
250x100	13,60	41946	15	310	310	325
250x125	16,30	41947	35	335	335	370
250x200	20,40	41948	90	385	385	475
250x250	31,50	41949	130	430	430	560
300x125	21,00	41950	15	360	360	375
300x200	30,00	41951	70	440	415	485
300x250	36,90	41952	115	465	465	580
300x300	48,20	41953	155	505	505	660

## PLUG



DN	kg/pcs.	ART.NR.	L
100	0,80	41930	40
125	1,10	41931	45
150	1,60	41932	50
200	3,10	41933	60
250	6,00	41934	70
300	9,50	41935	80

## CLEANING PIPE WITH RECTANGLE COVER



DN	kg/pcs.	ART.NR.	H	G	d	A	F	L
100	7,00	41954	83	160	100	200	230	340
125	10,00	41955	101	190	125	225	255	370
150	12,80	41956	112	215	150	250	280	395
200	25,20	41957	137	265	200	300	330	465
250	36,50	41958	170	330	259	350	426	570
300	51,00	41959	195	380	309	400	476	640

## Material characteristics

### Density

approx. 7.2 kg/dm<sup>3</sup> (71.5 kN/m<sup>3</sup>)

### Tensile strength

≥150 MPa for fittings  
≥200 MPa for pipes

### Compressive strength

approx. 3 to 4 times the value for tensile strength

### Shear strength

approx. 1.1 to 1.6 times the value for tensile strength

### Crushing strength

(peak compressive strength)  
≥350 MPa

### Modulus of elasticity

8. 10<sup>4</sup> to 12.10<sup>4</sup> N/mm<sup>2</sup>

### Poisson's ratio - (0,3)

### Heat resistance

PREIS® BML complies with fire resistance class A2 according to EN 13501 - not combustible\*

### Coefficient of thermal conductivity

50-60 W/mK (at 20°C)

### Coefficient of linear expansion

only 0.0100 mm/mK (between 0 and 100°C) more or less similar to concrete; can be set in concrete without any difficulty

### Chemical resistance

PREIS® BML is highly resistible against domestic sewage water with a pH value between pH2 and pH12

# Couplings and clamps

## Properties

### Rapid INOX coupling with EPDM casket



- Applications: for underground laying and may also be exposed to all weather conditions for aggressive environments (when air contains salt, ...)
- Axial restraint up to 0.5 bar inner pressure
- Locked with only one screw (up to DN100)
- Materials:
  - Coupling: stainless steel V4A 1.4571
  - Locked by a screw M6 x 45 mm, 6 mm Hexagon socket: stainless steel A4-80
  - Clamping bolt: stainless steel V4A 1.4404
  - Rubber gasket for sound reduction: EPDM- Shore=55° +/-5°

DN	PU	ART.NR.	Torque (Nm)
100	50	26685	13-15
125	70	21866	13-15
150	25	26687	13-15
200	15	21868	13-15
250	4	25785	13-15
300	4	25786	13-15

### BML-INOX-coupling



- axial not tensile
- Building component approved according to EN 877
- Coupling made of ozone-resistant EPDM elastomer according to DIN EN 681-1
- Clamping bolts made of stainless steel V4A / 1.4404 according to DIN EN 10088-2
- Reinforced clamping bolts
- Angled up to a maximum of 3 ° is possible
- Pressure tight up to 2.5 bar water / -0.3 bar vacuum
- high pressure resistant up to 120 bar
- temperature resistant from -40°C to + 120°C (briefly up to + 160°C)
- Approved for bridge drainage according to DIN EN 16397-2

DN	PU	ART.NR.	Torque (Nm)
400	1	42480	20
500	1	42481	20
600	1	42482	20

### Rapid clamp



- Material: DD11 - galvanized
- Clip collar with axial restraint
- For internal pressure loads up to 10 bar
- Two parts clip collar with claws and four Allen screws (up to DN 125)
- The same tools to be used as for PREIS® Rapid - couplings, therefore, no change of tools necessary = saves time
- Applications: Pressurized pipes, rainwater and wastewater pipelines in areas affected by backwaterproduct

DN	PU	ART.NR.	Torque (Nm)
100	25	21857	27-29
125	10	21858	27-29
150	10	21859	27-29



## BML-CONNECT-F-INOX-coupling



- axial not tensile
- EPDM elastomer seal
- temperature resistant from -20°C to +80°C
- Two-lip sealing system
- Housing made of stainless steel 1.4571
- Locking bolt made of stainless steel 1.4401
- 1.4404 stainless steel screw
- standard band insert
- Stainless steel protective ring on both sides

DN	PU	ART.NR.	Torque (Nm)
100	100	44019	10
125	100	44020	25
150	100	44022	30
200	50	44023	25
250	50	44024	25
300	25	44025	25
400	20	44027	40
500	10	44035	40
600	20	44036	40

## BML-CONNECT-G-INOX-coupling



- axially tensile coupling
- EPDM elastomer seal
- temperature resistant from -20°C to +80°C
- Two-lip sealing system
- Housing made of stainless steel 1.4571
- Locking bolt made of stainless steel 1.4401
- 1.4404 stainless steel screw
- standard band insert
- With conically stamped toothed ring made of stainless steel on both sides
- withstands strong vibrations
- shockproof

DN	PU	ART.NR.	Torque (Nm)
100	100	44041	30
125	100	44042	50
150	100	44043	60
200	50	44044	150
250	50	44045	180
300	25	44046	180
400	20	44047	180
500	10	44048	180
600	20	44049	200

## Universal clamp



- The clamp for high tensile loads
  - PREIS® RAPID for pressure loads up to 10 bar
  - CV for a maximum pressure load of 5 bar (DN 50–200)
  - CV for a maximum pressure load of 3 bar (DN 250–300)
- Only two screws--> shorter assembly time
- Block tightening --> no special tools required (visual check)
- Only one clamp for several couplings --> a 15% reduction in stockholding costs
- Applications: Pump pressure lines for pump stations, rainwater and wastewater pipelines in areas at risk from backwater

DN	PU	ART.NR.	Torque (Nm)
200	4	19997	15-20
250	4	23196	15-20
300	4	23197	15-20


## Flexible pipe couplings

### — Properties

Highly flexible pipe connectors, consisting of a high-quality elastic hose made of EPDM elastomer, are used in modern bridge construction to compensate linear expansion.



The pipe connectors are available in the dimensions from DN 100 to DN 500.

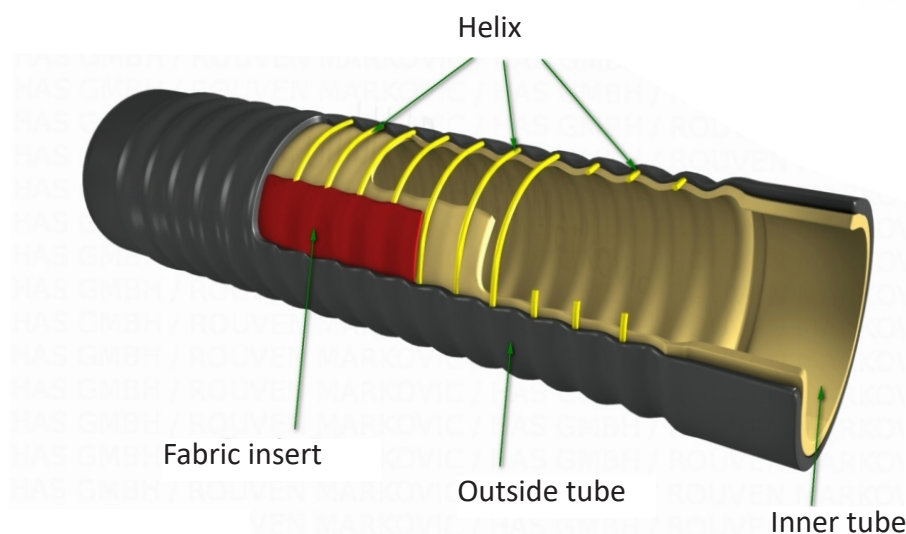

#### BML pivot bolt clamp

- for fastening the elastic BML pipe coupling
- completely made of stainless steel V4A/14571 (1.4401)




#### BML pipe connector flexible 5G

- |                                      |                                 |
|--------------------------------------|---------------------------------|
| ✓ axial not tensile                  | ✓ very weatherresistant         |
| ✓ only for pressureless installation | ✓ compensates length expansions |
| ✓ highly flexible                    | ✓ other lengths on request      |
| ✓ very resistant to aging            |                                 |

#### BML pipe connector flexible CR

- |                                      |                                 |
|--------------------------------------|---------------------------------|
| ✓ axial not tensile                  | ✓ weatherproof                  |
| ✓ only for pressureless installation | ✓ compensates length expansions |
| ✓ highly flexible                    | ✓ other lengths on request      |
| ✓ resistant to aging                 |                                 |



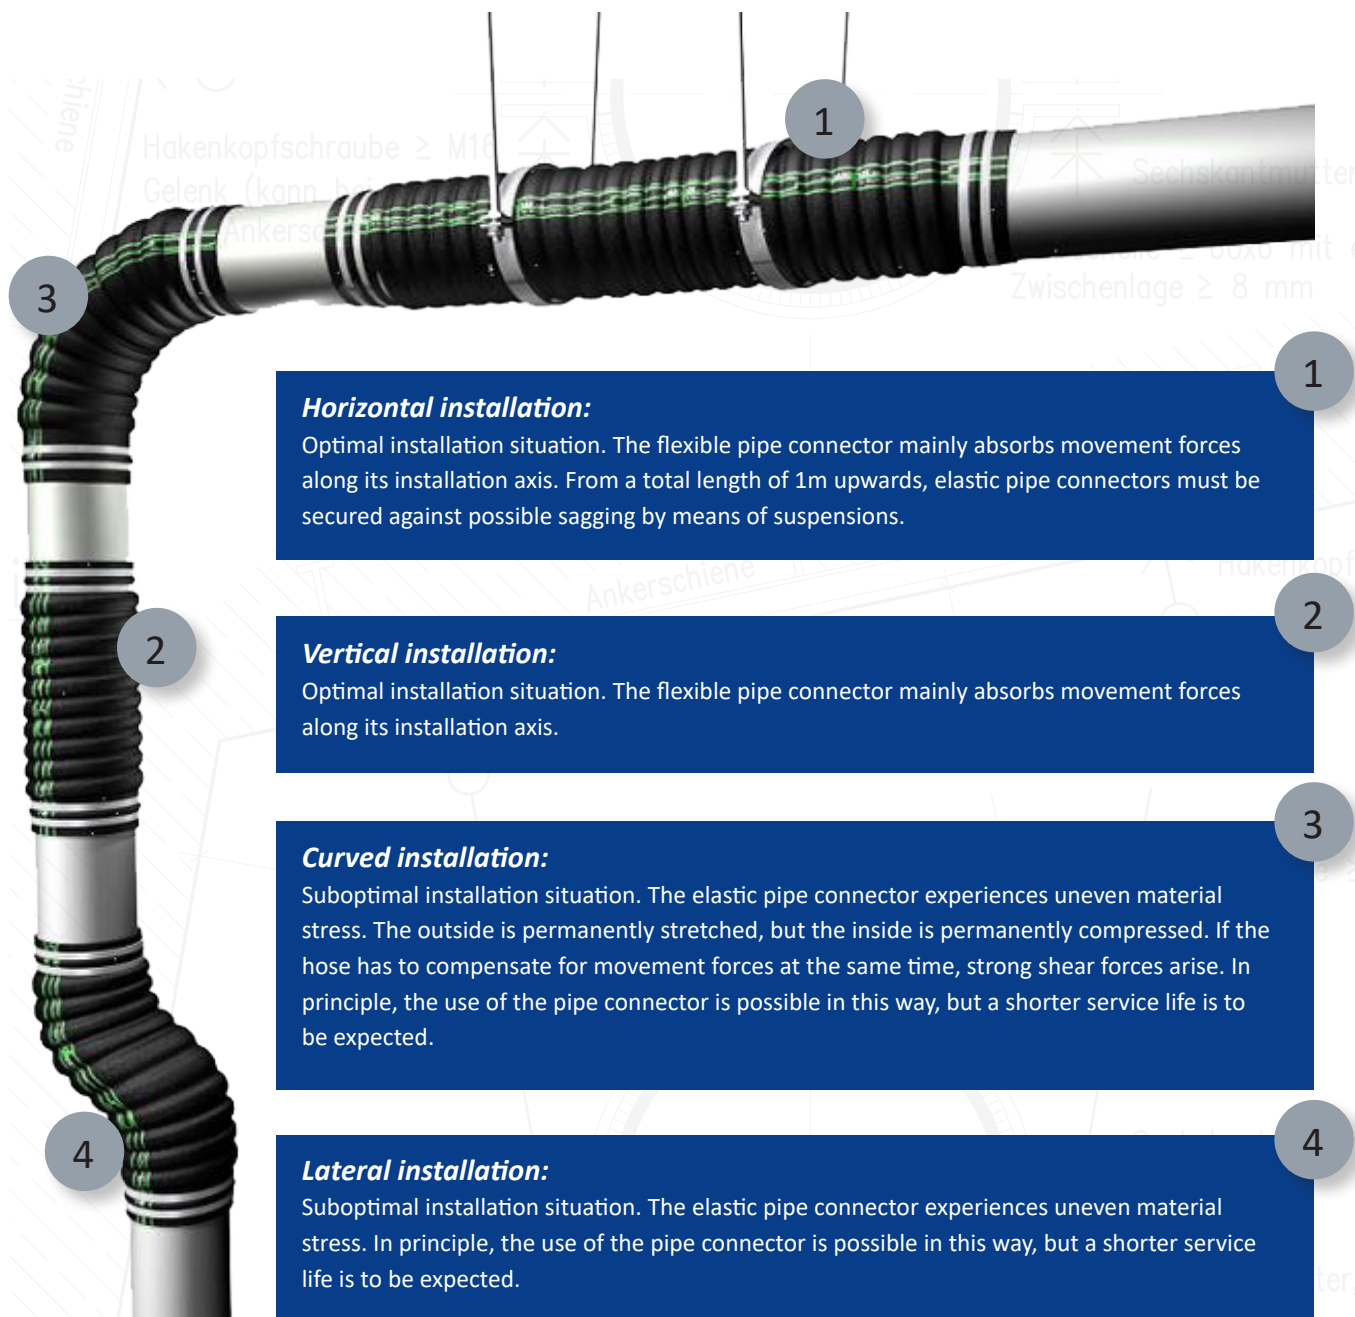

## Pelješac Bridge in Croatia

One of our greatest projects

**BML pipe DN150 - total 1,230m**

For particularly demanding environments and requirements for the material, as well as special UV protection, we apply an additional layer of polyurethane (PU) (approved by ZTV-ING and TL / TP-KOR). The standard color is gray, but any RAL color can be specified upon customer request.





#### Head office

PREIS GmbH  
Josef Nitsch-Straße 5  
A-2763 Pernitz, Austria  
Tel: +43 (0)2632/733 55-0  
office.ds@preisgroup.com



#### Foundry

FERRO-PREIS d.o.o  
Dr. Tome Bratkovica 2  
HR-40000 Cakovec, Croatia  
Tel: +385 (0)40/384 206  
office.croatia@preisgroup.com



[www.preisgroup.com](http://www.preisgroup.com)

Contact us!



FP PREIS® BML